

NAFA SERIES SPRING RETURN DAMPER ACTUATOR

2 Point Spring Return Control
8 Nm

NENUTEC®

INNOVATIVE MEMBER OF SWISSTECH

NENUTEC ASIA PACIFIC PTE LTD

7030 Ang Mo Kio Ave 5
#03-56 Northstar @ AMK
Singapore 569 880



(65) 6570 3233



(65) 6570 6783



info@nenutec.com.sg

DAMPER ACTUATOR MODEL CHART

MODEL								
VOLTAGE 230VAC ~ 24VAC/DC	●	●	●	●	●	●	●	●
TORQUE (NM)	2 ; 5 ; 10 ; 20 ; 40	2 ; 5 ; 10 ; 20 ; 40	5 ; 10 ; 20	5 ; 10 ; 20	3 ; 5 ; 8	3 ; 5 ; 8	10 ; 15	5
CONTROL	2/3 pts	Modulating	2 pts	Modulating	2 pts SR	2 pts SR	3 pts	Modulating

SPECIAL TYPE

ELECTRONIC RETURN			●	●				
SPRING RETURN					●			
FIRE & SMOKE SPRING RETURN						●		
SMOKE SAFETY							●	
NETWORKING								●

TYPE DESIGNATION

TYPE	ACTUATOR	DESIGNATION	CONTROL	VOLTAGE	DOT	INPUT SIGNAL	HYPHENATED	TOQUE		AUXILIARY SWITCH
N	A	C	M	1	.	1	-	0	5	S1

TYPE	N = Standard Actuator
	S = Fire & Smoke
ACTUATOR	A = Standard Actuator
	E = Electronic Return
DESIGNATION	C = Standard Actuator
	S = Fast Running Actuator
	F = Spring Back Actuator
CONTROL	A = 2/3 Points
	M = Modulating
VOLTAGE	1 = 24 VAC/VDC
	2 = 230 VAC
	3 = 110/120 VAC
	4 = 48 VAC

INPUT SIGNAL (NOT APPLICABLE FOR 2/3 POINTS)	1 = 0(2)...10 VDC and 0(4)...20 mA	
	2 = 0...10 VDC only	
	3 = 0...135 Ω only	
	4 = 4...20 mA only	
TORQUE	02 = 2 Nm	03 = 3 Nm
	05 = 5 Nm	08 = 8 Nm
	10 = 10 Nm	15 = 15 Nm
	20 = 20 Nm	40 = 40 Nm
AUXILIARY SWITCH / FEEDBACK POTENTIOMETER	None = No Auxiliary or Feedback Potentiometers	
	S1 = 1 x Auxiliary Switch	
	S = 2 x Auxiliary Switches	
	P1 = 1000Ω	
	P2 = 10000Ω	
	P3 = 140Ω	

NAFA SERIES

SPRING RETURN DAMPER ACTUATOR

2 Point Spring Return Control
8 Nm

NAFA...08 (S) SERIES

NAFA series Spring Return actuators are developed for general air damper application, rotary valve and other devices which require a fail-safe function. During normal operation, the actuator motorized the device. In the event of power outage, the actuator springs back to its original position.




PRODUCT FEATURE

- Torque 8 Nm
- Damper size 1.5 m²
- Power supply AC/DC 24V and AC 230 V
- Shaft dimensions - Ø 10...20 mm / □ 7...14 mm
- Minimum Shaft Length 40 mm
- Adjustable angle of rotation
- Selectable direction of rotation of reversing actuator
- Actuator with 1 m cable connection
- Optional 1 Fixed and 1 Adjustable SPDT auxiliary switches

MODEL SELECTION TABLE

MODEL / TYPE	TORQUE	POWER SUPPLY	RUNNING TIME	AUXILIARY SWITCHES
NAFA 1-08	8 Nm	AC/DC 24 V $\pm$ 10%	70...90 sec (Spring Back <25 sec)	-
NAFA 1-08S	8 Nm	AC/DC 24 V $\pm$ 10%	70...90 sec (Spring Back <25 sec)	2 x SPDT (Fixed & Adjustable)
NAFA 2-08	8 Nm	AC 230 V $\pm$ 10%	70...90 sec (Spring Back <25 sec)	-
NAFA 2-08S	8 Nm	AC 230 V $\pm$ 10%	70...90 sec (Spring Back <25 sec)	2 x SPDT (Fixed & Adjustable)

DIMENSION (mm)

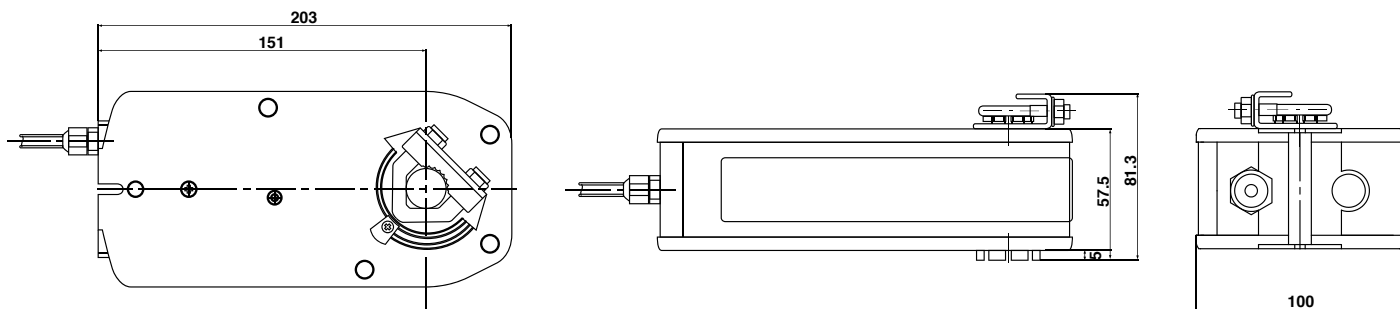

TECHNICAL SPECIFICATION


MODEL NUMBER	NAFA 1-08 (S)	NAFA 2-08 (S)
TORQUE	8 Nm	8 Nm
DAMPER SIZE	1.5 m ²	1.5 m ²
SHAFT DIMENSION	Ø 10...20 mm / □ 7...14 mm	Ø 10...20 mm / □ 7...14 mm
POWER SUPPLY	AC/DC 24 V ± 10%	AC 230 V ± 10%
FREQUENCY	50...60 Hz	50...60 Hz
CONTROL SIGNAL	2 point control	2 point control
POWER CONSUMPTION		
● OPERATING	7.0 W	8.0 W
● END POSITION	2.0 W	5.5 W
FOR WIRE SIZING	8.0 VA	8.0 VA
ELECTRICAL CONNECTION	1 m Cable	1 m Cable
AUXILIARY SWITCHES RATING	3 (1.5) A, AC 250 V	3 (1.5) A, AC 250 V
PROTECTION CLASS	Class III ⚡	Class II ⚡
ANGLE OF ROTATION	-5...+90° (mechanical)	-5...+90° (mechanical)
WEIGHT	2.2 Kg	2.2 Kg
LIFE CYCLE	60,000 Rotation	60,000 Rotation
SOUND LEVEL	45 dB	45 dB
IP PROTECTION	IP54	IP54
OPERATING TEMPERATURE	-20°...50° as per IEC 721-3-3	-20°...50° as per IEC 721-3-3
NON-OPERATING TEMPERATURE	-30°...+60° C / IEC 721-3-2	-30°...+60° C / IEC 721-3-2
AMBIENT HUMIDITY	5%...95% rH non condensing / EN	5%...95% rH non condensing / EN
MAINTENANCE	Maintenance Free	Maintenance Free
MODE OF OPERATION	Type I / EN 60730-1	Type I / EN 60730-1
EMC	CE & ISO 9000 EN / EEC	CE & ISO 9000 EN / EEC

NAFA SERIES


SPRING RETURN DAMPER ACTUATOR

2 Point Spring Return Control
8 Nm


WIRING DIAGRAM NAFA...08 (S) POWER SUPPLY AC/DC 24 V / AC 230V

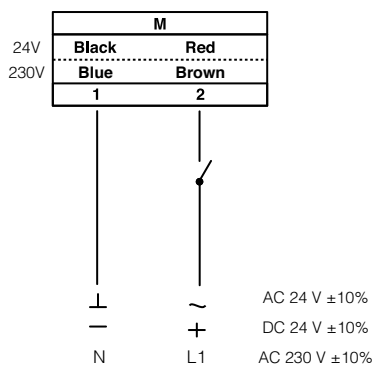

DIRECTION OF ROTATION NAFA...08 (S)

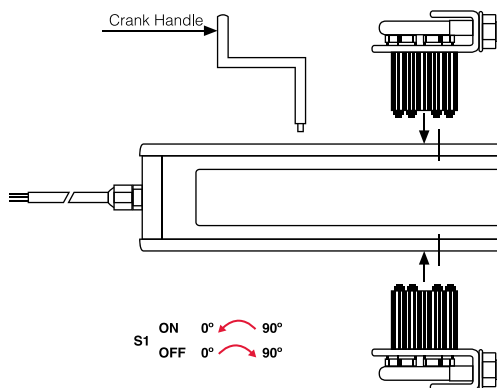


WIRING DIAGRAM NAFA...08 (S) AUXILIARY SWITCHES

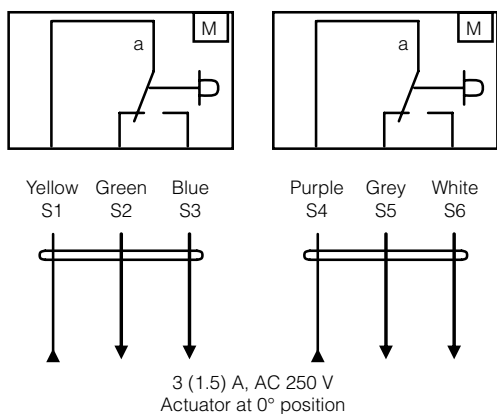

AUXILIARY SWITCHES NAFA...08 (S)


Built-in Micro Switch Adjustment (NAFA)

Move the screw of the microswitch

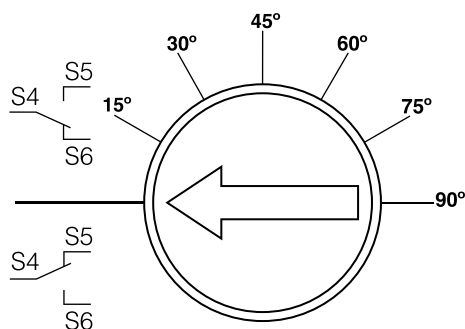

Switch **a** factory set at 5°
Switch **b** adjustable 0°...90°



ANGLE OF ROTATING LIMITING

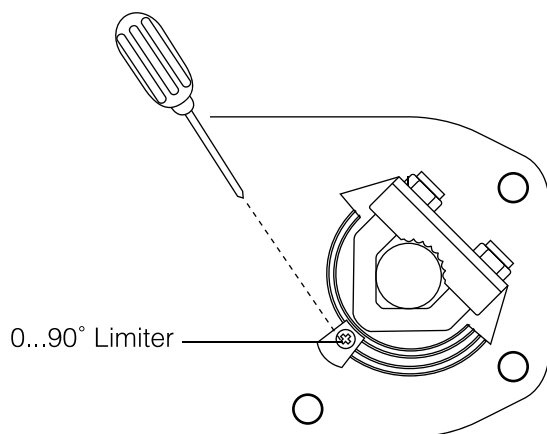

Mechanical Limited Adjustment

- ① Loosen screw of the mechanical limiter plate.
- ② Move the limiter plate to the appropriate position.
- ③ Tighten the screw.

INSTALLATION / MOUNTING INSTRUCTION

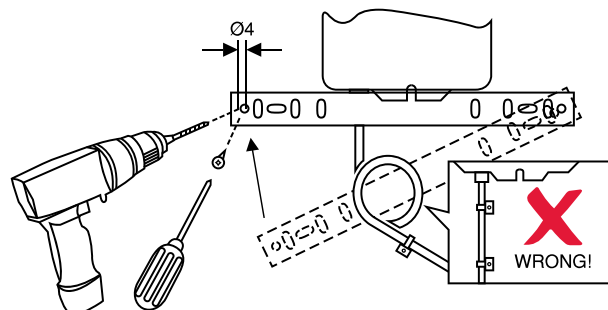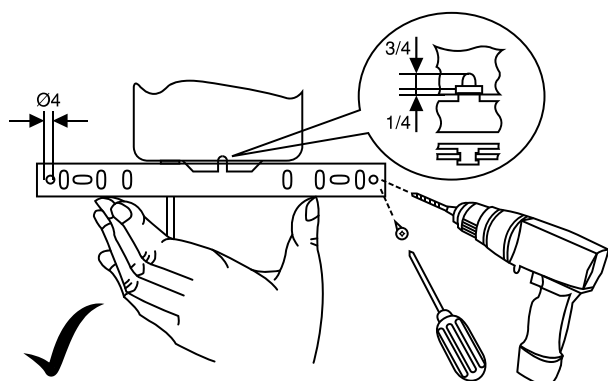

IMPORTANT REMARK

For special requirement, consult your local Nenutec's representative.



This actuator includes electrical and electronic components and may not be disposed as household garbage. Please consider the local valid legislation.



AC / DC 24 V:
AC 230 V:

Connect via safety isolating transformer.
To isolate from the main power supply, the system must incorporate a device which disconnects the phase conductor (with at least a 3mm contact gap.)

The performance specifications are nominal and conform to acceptable industry standards. NENUTEC shall not be liable for damages resulting from misapplication or misuse of its products.