

NEBM SERIES

BALL VALVE ELECTRONIC RETURN ACTUATOR

Modulating Control
10 Nm

NENUTEC[®]

INNOVATIVE MEMBER OF SWIS⁺TEC

NENUTEC ASIA PACIFIC PTE LTD
7030 Ang Mo Kio Ave 5
#03-56 Northstar @ AMK
Singapore 569 880



 (65) 6570 3233

 (65) 6570 6783

 info@nenutec.com.sg

NEBM SERIES

BALL VALVE ELECTRONIC RETURN ACTUATOR

Modulating Control
10 Nm



NEBM...10 (S) HN SERIES

NEBM series standard valve actuators are especially designed and produced for applications in the HVAC systems. Our wide range of standard valve actuators has been developed to operate and position ball valves of different sizes.


PRODUCT FEATURE

- Torque 10 Nm
- Valve size DN40(1½") / DN50(2")
- Power supply AC/DC 24 V
- Control Modulating DC 0(2)...10 V & DC 0(4)...20 mA
- Shaft dimensions - □ 9.0 mm (fixed)
- Selectable direction of rotation of reversing actuator
- Actuator with 1 m cable connection
- Optional 2 Adjustable SPDT auxiliary switch

MODEL SELECTION TABLE

MODEL / TYPE	TORQUE	POWER SUPPLY	RUNNING TIME	RETURN	AUXILIARY SWITCH
NEBM 1.1-10 HN	10 Nm	AC/DC 24 V ± 10%	65...70 sec	40 sec	-
NEBM 1.1-10S HN	10 Nm	AC/DC 24 V ± 10%	65...70 sec	40 sec	2 x SPDT (Adjustable)

DIMENSION (mm)

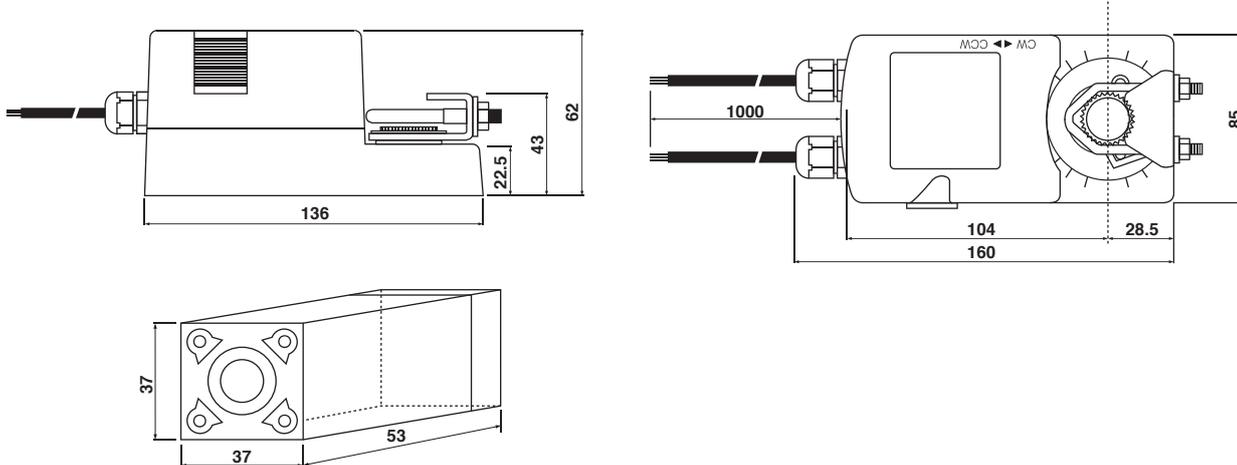


TECHNICAL SPECIFICATION

MODEL NUMBER	NEBM 1-10 (S) HN
TORQUE	10 Nm
VALVE SIZE	DN40(1½") / DN50(2")
SHAFT DIMENSION	□ 9.0 mm (fixed)
POWER SUPPLY	AC/DC 24 V ± 10%
FREQUENCY	50...60 Hz
CONTROL SIGNAL (INPUT)	DC 0(2)...10 V, 0(4)...20 mA
POSITION SIGNAL (OUTPUT)	DC 0...10V
POWER CONSUMPTION	
● OPERATING	7.2 W
● END POSITION	1.2 W
FOR WIRE SIZING	14.0 VA
ELECTRICAL CONNECTION	1 m Cable
AUXILIARY SWITCH RATING	3 (1.5) A, AC 250 V
PROTECTION CLASS	Class III ⚡
ANGLE OF ROTATION	90° (95° mechanical)
WEIGHT	< 0.8 Kg
LIFE CYCLE	60,000 Rotation
SOUND LEVEL	40 dB
IP PROTECTION	IP54
OPERATING TEMPERATURE	-20°...50° as per IEC 721-3-3
NON-OPERATING TEMPERATURE	-30°...+60° C / IEC 721-3-2
AMBIENT HUMIDITY	5%...95% rH non condensing / EN
MAINTENANCE	Maintenance Free
MODE OF OPERATION	Type I / EN 60730-1
EMC	CE & ISO 9000 EN / EEC

NEBM SERIES BALL VALVE ELECTRONIC RETURN ACTUATOR

Modulating Control
10 Nm


WIRING DIAGRAM NEBM...10 (S) HN POWER SUPPLY AC/DC 24V

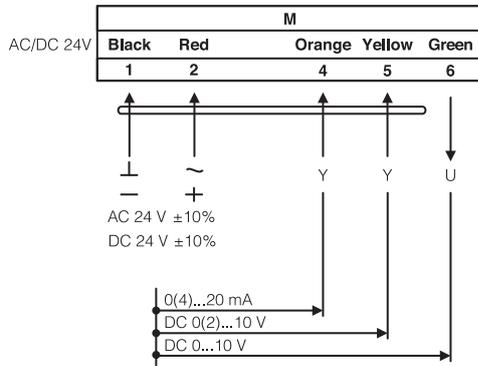


DIRECTION OF ROTATION NEBM...10 (S) HN

Default factory setting: CCW.

Direction of rotation can be change by toggling between CW/CCW switch on the actuator's housing.

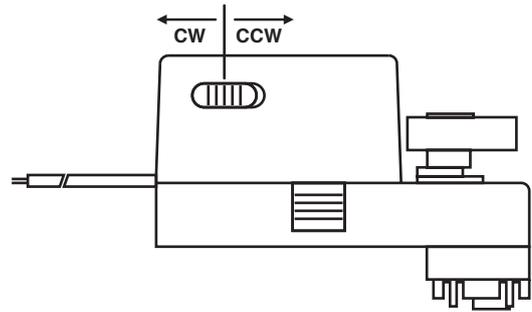


WIRING DIAGRAM NEBM...10 (S) HN AUXILIARY SWITCH

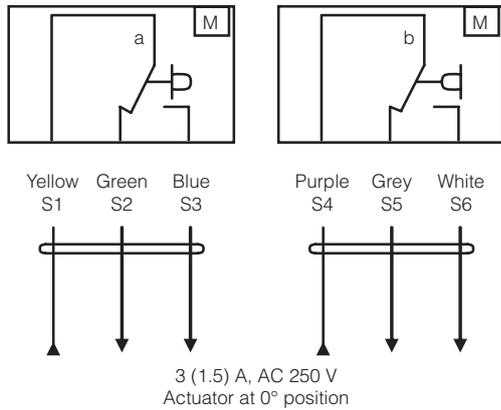


AUXILIARY SWITCH NEBM...10 (S) HN

Switch **a** factory-set at 5° and 85°.

The auxiliary switch can be optimally adjusted between 0°...90°.

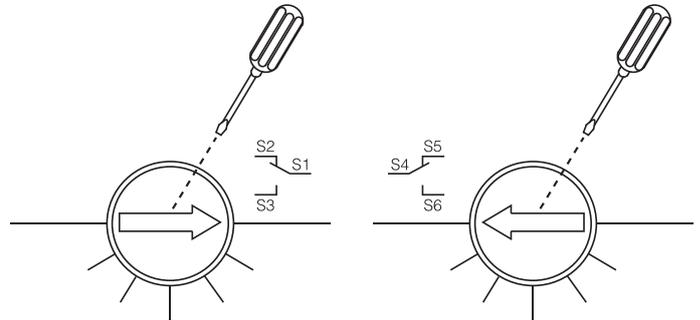

WIRING DIAGRAM NEBM...10 (S) HN PARALLEL CONNECTION

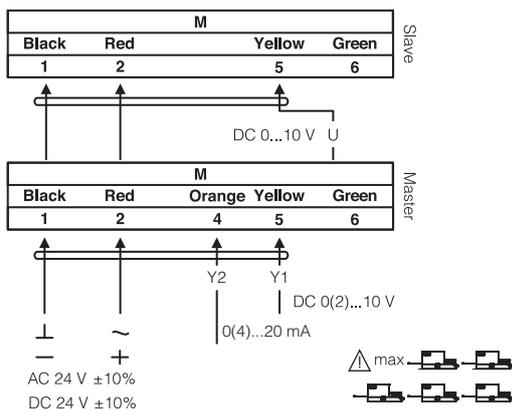

REMARK




Parallel connection of NEBM...10 (S) HN actuators are limited to 5. Power consumption must be observe.




MIXING CLOSED

MIXING OPEN



ACTUATOR POSITION

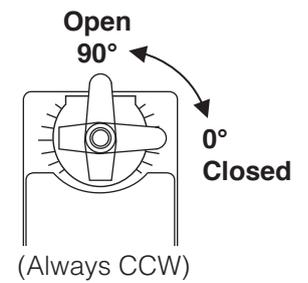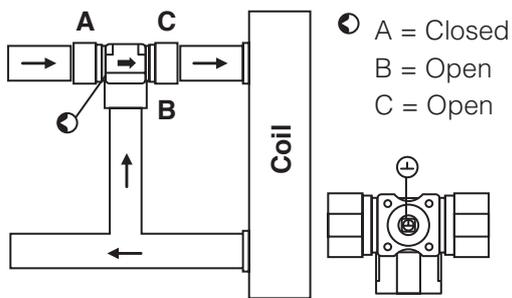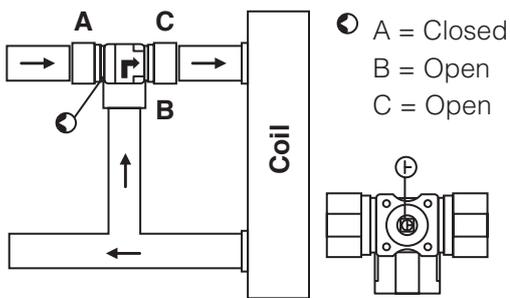

2-way Closed 2-way Open

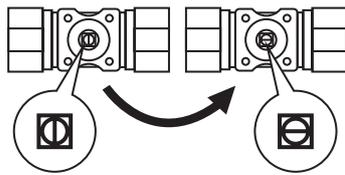

3-way Closed 3-way Open

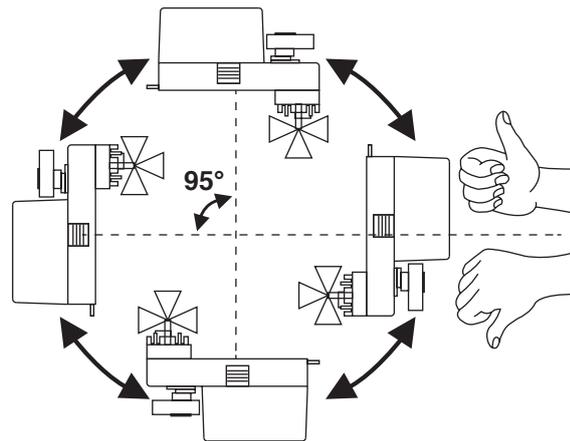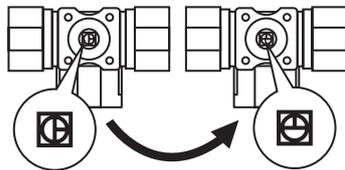

IMPORTANT REMARK

For special requirement, consult your local Nenutec's representative.

This actuator includes electrical and electronic components and may not be disposed as household garbage. Please consider the local valid legislation.

AC / DC 24 V: Connect via safety isolating transformer.
 AC 230 V: To isolate from the main power supply, the system must incorporate a device which disconnects the phase conductor (with at least a 3mm contact gap.)

The performance specifications are nominal and conform to acceptable industry standards. NENUTEC shall not be liable for damages resulting from misapplication or misuse of its products.